



ATyS C55

ATS Controller

mid-level functionalities

Transfer switches

new



ATyS C55

Function

ATyS C55 is a complete ATSE controller that can be used to pilot a remotely operated transfer switch of any technology: motorised switches (e.g. ATyS r, ATyS S or ATyS d M), circuit breakers or contactors. ATyS C55 ensure the automatic or remotely controlled transfer from one source to another, with configurable timers and thresholds, for any combination of sources: 2 transformers, 1 transformer and 1 genset or 2 gensets.

Advantages

Fast commissioning

On initial power up, the ATyS C55's smart wizard will guide the operator through the commissioning process.

Versatile

The ATyS C55 is compatible with contactors, breakers and switches. It can also work for all type of 2-source applications combining mains and gensets.

Clear visualisation and operation

- High-resolution LCD screen with clear defined messages.
- Real-time pop-ups to show timers, alarms, faults and information alerts.
- Quick and easy access to main functions through the front face with direct key input.
- Complete configuration can be achieved through the front face or via software (EasyConfig).

General characteristics

- Self-powered from sensing.
- Wide voltage range (88-576VAC).
- 24 VDC aux power supply (for optional use).
- 2 latching relays.
- Smart commissioning wizard.
- IP65 degree of protection with gasket (accessory).
- 1000 Alarms and Events.
- 6 fully configurable I/O.
- Genset scheduler.
- Door or back plate mounting.
- Main/Main, Main/Genset and Genset/Genset applications.
- Easyconfig configuration software.
- RS485 Modbus communication.
- Ethernet, SNMP, BACnet using DIRIS M-70 gateways. Includes Webserver.
- A DIRIS Digiware D-70 gateway can be utilised as a remote display for multiple ATyS C55/C65 controllers; the D-70 also provides Ethernet, SNMP & BACnet connectivity.

References

Description	Reference
ATyS C55 – ATS controller (includes mounting kits)	1600 0055
IP65 gasket for door cut-out ⁽¹⁾	1609 0001
DIRIS Digiware M-50 multi-protocol Ethernet gateway	4829 0221
DIRIS Digiware D-50 multipoint display, Ethernet output	4829 0204
DIRIS Digiware M-70 communication gateway for Ethernet & Webserver	4829 0222
DIRIS Digiware D-70 communication gateway for Ethernet & Webserver and multi-product display	4829 0203
Double power supply - DPS	1599 4001

⁽¹⁾ The gasket provides an IP65 seal between the controller and the panel door; the front face (display & keys) is IP65 as standard.

The solution for

- > Commercial buildings
- > Applications:
 - Genset/Genset
 - Network/Genset
 - Network/Network
 - External/portable systems



Strong points

- > Smart commissioning
- > Intuitive use
- > Hi-resolution LCD screen

Conformity to standards

- > IEC 61010-2-201
- > IEC 60947-6-1
- > GB/T 14048.11 Annex C



Communication gateways



DIRIS Digiware M-70 & D-70

Double power supply - DPS*




* Optional for use with ATyS r, breakers and contactors without integrated DPS

Front panel



Dimensions (mm)

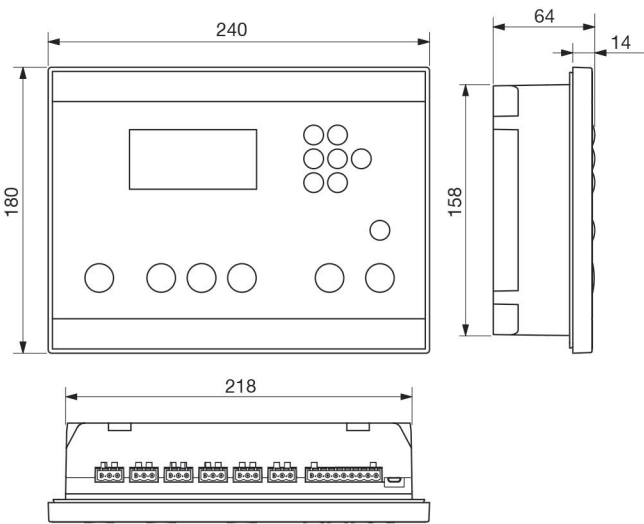

Characteristics

Electrical characteristics		Mechanical characteristics	
AC operating limits	110 - 480 VAC ±20%	Weight	1080 gr
Optional DC supply	24 VDC	Door cutout	220 x 160 mm
Frequency limits	45 - 65 Hz	Protection degree	IP65 with optional gasket
Power consumption	< 10 W	Operating temperature	-30 ... +70 °C
Inputs	6, fully programmable	Communications	
Outputs	6, fully programmable	Interface type	RS485. 2 to 3 half duplex wires
Output relays	8 A AC15	Protocol	MODBUS RTU
EMC classification	Class A and B	Baudrate	programmable 1200 - 115200 bps
Impulse withstand	8/6 kV ⁽¹⁾	Display	
Overvoltage category	CAT 3	Screen resolution	350 x 160 pixels
(1) 8 kV tested between phases of a different source and 6 kV tested between phases of a the same source.		Event recorder	1000 events

Terminals

